


# SPESIFIKASI LAMPU PJU-TS 50 WATT LED OSRAM


1. LAMPU LED OSRAM 50 WATT HIGH LUMENS	2. Spesification LED OSRAM 50 Watt
	<ul style="list-style-type: none"> <li>. Dual power source : Ac / Dc</li> <li>. Protection : IP 66 Design Outdoor</li> <li>. High efficacy : Up to 120lm/W</li> <li>. Lumens : 6000lm</li> <li>. Long lifetime : 50,000 hours</li> <li>. Warranty : 2 ~ 3 years</li> <li>. Material : Aluminum</li> <li>. Kelvin color / CCT : 4000K ~ 5600K</li> <li>. Beam Angle : 150 x 60</li> </ul>


	<p style="text-align: center;"><b>LEDENVO™ LED Street Light</b> Photometrics Light Distribution Curve</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>150° x 60°</p>  <p>150° 180° 90° 0° 30° 60° 90° 120° 150° 180° 30° 60° 90° 120° 150° 180° candle 0°</p> <p>150° 180° 90° 0° 30° 60° 90° 120° 150° 180° 30° 60° 90° 120° 150° 180° candle 0°</p> </div> <div style="text-align: center;"> <p>150° x 70°</p>  <p>150° 180° 90° 0° 30° 60° 90° 120° 150° 180° 30° 60° 90° 120° 150° 180° candle 0°</p> </div> </div> <p style="font-size: small; text-align: center;"> <small>Due to the repeating nature of LEDs, the beam distribution and distance lumens may differ slightly from the actual parameters of individual LEDs. Specifications are subject to change without notice. Please refer to our website for the most recent edition.</small>  <small>© 2013 LEDENVO™ All rights reserved.   <a href="http://www.ledenvo.com">www.ledenvo.com</a></small> </p>
---	---


PT.TATACIPTA PELANGI

<https://pjusolarcelltata.com/wp>

**HUBUNGI : Mr. Asep & Ms. Budiwati : 081319121920 – 081319832763**

1. Solar panel / PV Module	2. Spesification 80 Watt Pick / WP x 2 pcs
	<ul style="list-style-type: none"> <li>. Module type : Poly Crystalline</li> <li>. Power Output : 160 watt</li> <li>. Voltage at Pmax, Impp : 17.5 Volt</li> <li>. Current at Pmax ,Impp : 9,15 Amper</li> <li>. Open circuit current Voc : 21.6 Volt</li> <li>. Short circuit current Isc : 9.6 Amper</li> <li>. Warranty : 15 years</li> </ul>

1. Controller Smart SRNE 12/24 Volt {15-20 A}	2. Spesification SMART SRNE
	<ul style="list-style-type: none"> <li>. Model type : Smart SRNE</li> <li>. Power Input : 12/24 volt</li> <li>. Voltage input PV : 15 ~ 55 Volt</li> <li>. Current Max : 5 ~ 15 Amper</li> <li>. Volttage Load LED : 15 ~ 60 Volt</li> <li>. Protection : IP 68</li> <li>. Warranty : 1 years</li> </ul>

1. Battery Vrla / lead acid	2. Spesification
	<ul style="list-style-type: none"> <li>. Model type : Vrla – Lead acid</li> <li>. Power Amper : 120 Ah</li> <li>. Voltage : 12.6 ~ 13.2 Volt</li> <li>. Lifetime : 2 years</li> <li>. Warranty : 1 years</li> </ul>


**[HUBUNGI : Mr. Asep & Ms. Budiwati : 081319121920 – 081319832763](tel:081319121920)**

<b>1. Box Battery</b>	<b>2. Spesification</b>
-----------------------	-------------------------



- . Model type : Powder coating
- . Capacity Box Battery : 120 Ah
- . Lifetime : 2 years
- . Warranty : 1 years

<b>1. Light poles &amp; accessories</b>	<b>2. Spesification</b>
---	-------------------------

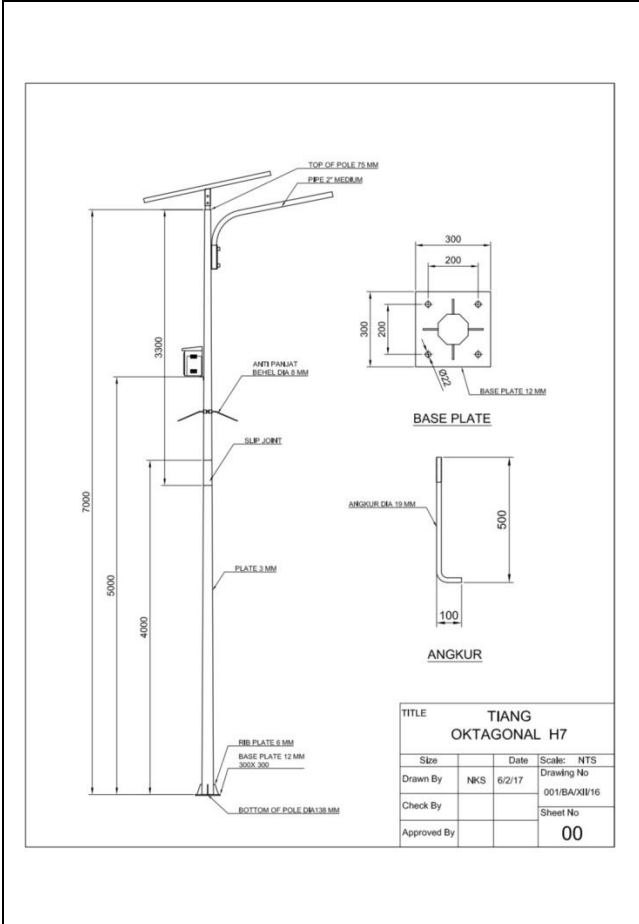

- . Model type : Octagonal Galvanis
- . Capacity Box Battery : 120 Ah
- . Standart pole height : 6 ~ 8 M
- . Lifetime : 20 years
- . Warranty : 10 years