

SPESIFIKASI LAMPU PJU-TS 60 WATT LED OSRAM

1. LAMPU LED OSRAM 60 WATT HIGH LUMENS



2. Spesification LED OSRAM 60 Watt

- . Dual power source : Ac / Dc 36V
- . Protection : IP 66 Design Outdoor
- . High efficacy : Up to 120lm/W
- . Lumens : 7200lm
- . Long lifetime : 50,000 hours
- . Warranty : 2 ~ 3 years
- . Material : Aluminum
- . Kelvin color / CCT : 4000K ~ 5600K
- . Beam Angle : 150 x 60




LEDENVO™ LED Street Light

Photometrics


Light Distribution Curve

150° x 60°



150° Beam Angle (1)

150° x 70°



150° Beam Angle (2)

Due to the repeating any component of LED, the actual luminous distribution and distance luminance may differ additional figure and do not necessarily correspond to the actual parameters of individual LED chip after the final assembly.


LED is IP 66. Specifications are subject to change without notice. Please read product literature, always refer back to see the most recent edition.


©2013 LEDENVO™. All rights reserved. Please contact us for more information.


1/23


PT.TATACIPTA PELANGI


<https://pjusolarcelltata.com/wp>

1. Solar panel / PV Module	2. Spesification 80 Watt Pick / WP x 2 pcs
	<ul style="list-style-type: none"> . Module type : Poly Crystalline . Power Output : 160 watt . Voltage at Pmax, Impp : 17.5 Volt . Current at Pmax ,Impp : 9,15 Amper . Open circuit current Voc : 21.6 Volt . Short circuit current Isc : 9.6 Amper . Warranty : 15 years

1. Controller Smart SRNE 12/24 Volt {15A}	2. Spesification SMART SRNE MPPT 15A
	<ul style="list-style-type: none"> . Model type : Smart SRNE . Power Input : 12/24 volt . Voltage input PV : 15 ~ 55 Volt . Current Max : 5 ~ 15 Amper . Volttage Load LED : 15 ~ 60 Volt . Protection : IP 68 . Warranty : 1 years

1. Battery Vrla / Lead acid	2. Spesification
	<ul style="list-style-type: none"> . Model type : Vrl – Lead Acid . Power Amper : 150 Ah . Voltage : 12.6 ~ 13.8 Volt . Lifetime : 3 years . Warranty : 1 years

1. Box Battery	2. Spesification
	<ul style="list-style-type: none"> . Model type : Powder Coating . Capacity Box Battery : 150 Ah . Lifetime : 2 years . Warranty : 1 years

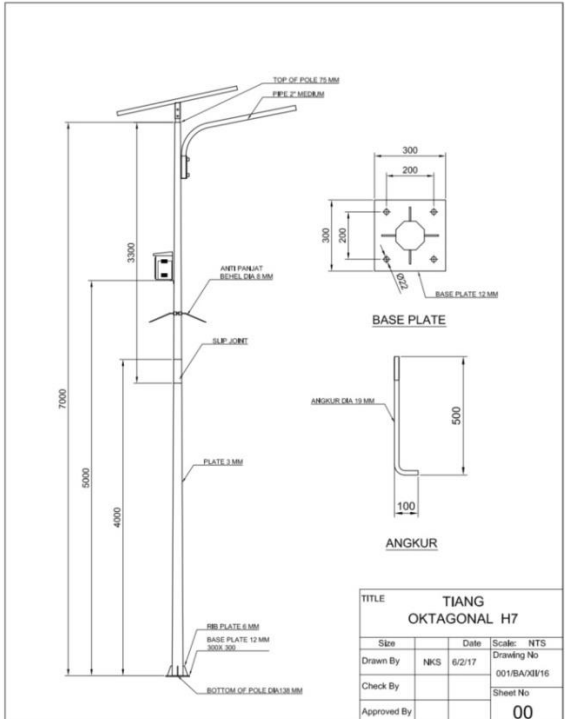1. Light poles & accessories	2. Spesification																												
 <table border="1" data-bbox="548 1648 755 1774"> <tr> <td colspan="4">TITLE</td> </tr> <tr> <td colspan="4">TIANG OKTAGONAL H7</td> </tr> <tr> <td>Size</td> <td>Date</td> <td colspan="2">Scale: NTS</td> </tr> <tr> <td>Drawn By</td> <td>NKS</td> <td>6/2/17</td> <td>Drawing No</td> </tr> <tr> <td>Check By</td> <td></td> <td></td> <td>001/BA08/16</td> </tr> <tr> <td>Approved By</td> <td></td> <td></td> <td>Sheet No</td> </tr> <tr> <td></td> <td></td> <td></td> <td>00</td> </tr> </table>	TITLE				TIANG OKTAGONAL H7				Size	Date	Scale: NTS		Drawn By	NKS	6/2/17	Drawing No	Check By			001/BA08/16	Approved By			Sheet No				00	<ul style="list-style-type: none"> . Model type : Octagonal Galvanis . Capacity Box Battery : 150 Ah . Standart pole height : 6 ~ 9 M . Lifetime : 20 years . Warranty : 10 years
TITLE																													
TIANG OKTAGONAL H7																													
Size	Date	Scale: NTS																											
Drawn By	NKS	6/2/17	Drawing No																										
Check By			001/BA08/16																										
Approved By			Sheet No																										
			00																										